

Plasterboard / Gyproc

ceiling panel work

Plaster Skim Flush

With MDF Plaster Trims

A motorised mechanism to reveal a display from the ceiling. This version hinges down by up to 100 degrees.

The size reference for this version is CHR6-RES.

The mechanism is fixed in place before the ceiling is finished. Supplied with MDF plaster edging to neatly plaster into the ceiling.


The control system can be operated via infra-red, RS232 or contact closure

Speakers can be added with the use of standard speaker mount brackets. (If required please specify during ordering process.)

See overview technical sheet for details on other products in the range.

Model Code	CHR6-RES
Max Screen Size	1530 [60.2] x 920 [36.2] x 100 [3.9]
Max Screen Weight	95kg [209lbs]
Approx Mechanism Weight	125kg [275lbs]
Environment	Residential
Colour	WHITE - RAL9910 Satin Finish
Control System	Accessible by internal access hatch
Mechanism Dimensions	2024 [79.7] W x 1305 [51.4] L x 210 [8.3] D

RESIDENTIAL MDF PLASTER EDGE

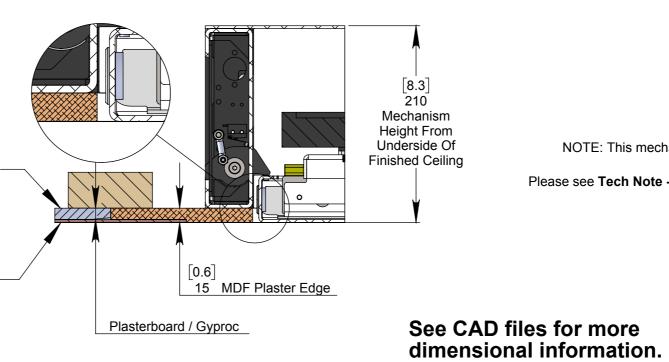

NOTE: This mechanism is not designed to accomodate aditional panelwork on the main hinging tray. Please see Tech Note - CHR-RES-AP Addon Panel Technical Note for more information.




www.futureautomation.net UK www.futureautomation.co.uk


OUT 100 DEGREES

tel: +1 (603) 742 9181 tel: +44 (0) 1438 833 577

CHR6-RES Residential Ceiling Hinge


OPTION 1 - FIXING TO WOODEN BEAMS LOAD BEARING-**Mounting Joist Width** [13.8 ±1.0] 350 ±25 79.7 0.0 2024 ⁺⁵ [8.9] 226 55.6±0.2 1412 ±5 [3.5 min.] 89 min. CABLE ROUTING HOLE 32 [1.3] MIN (BOTH SIDES) SIDE BATTEN FOR PLASTERBOARD / GYPROC FIXING 12.5 [0.5] PLASTERBOARD/ GYPROC **BORDER MECHANISM** 15 [0.6] MDF PLASTER EDGE TRIMS (SUPPLIED)

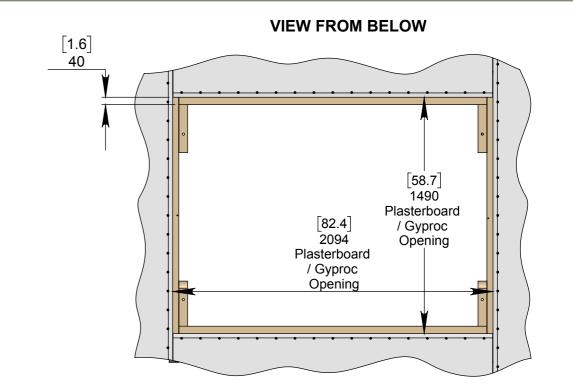

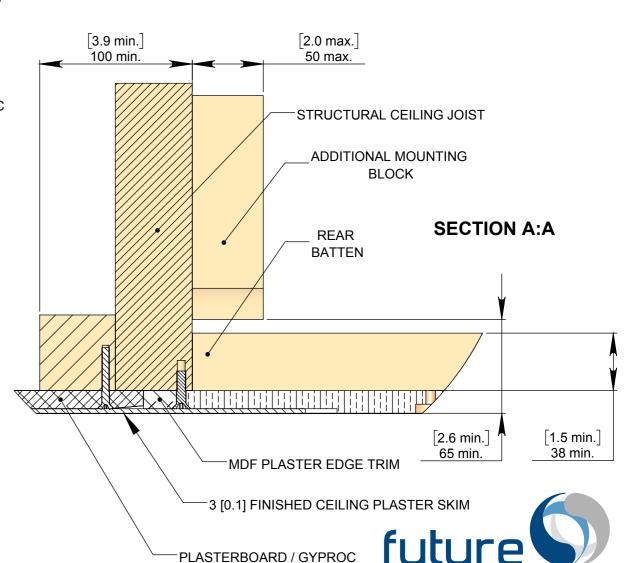


moving audio visual solutions


M6 x 16MM SS POZI BOLT (SUPPLIED)

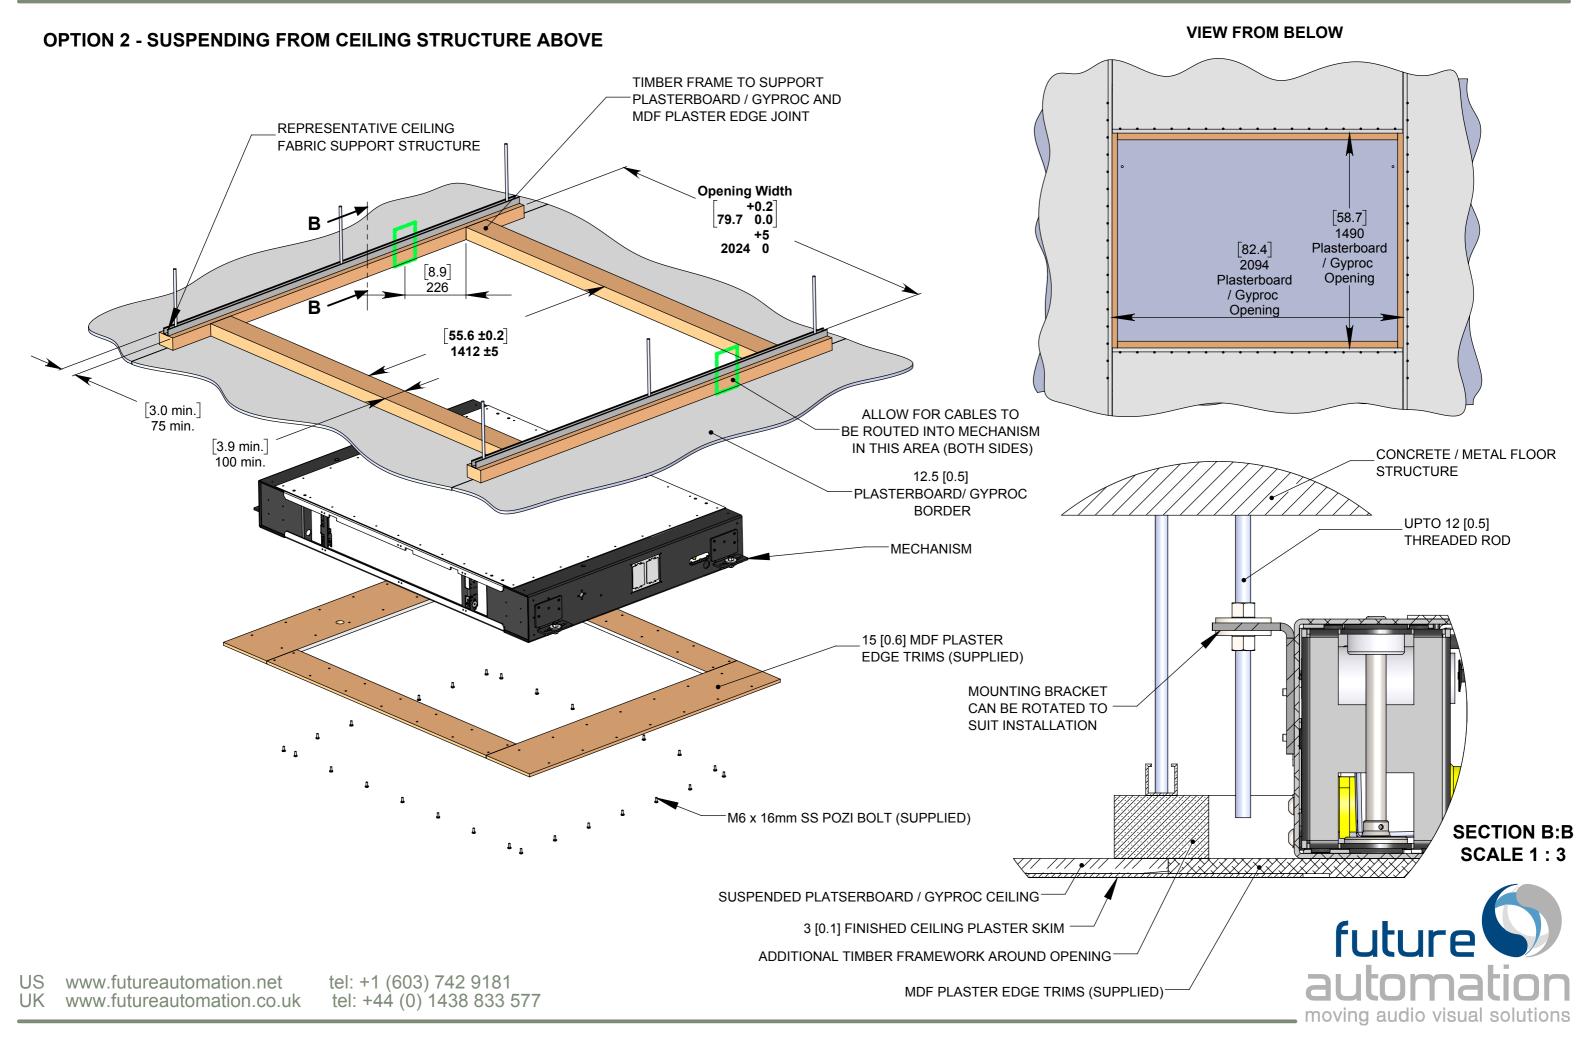

INSTALLATION PROCEDURE

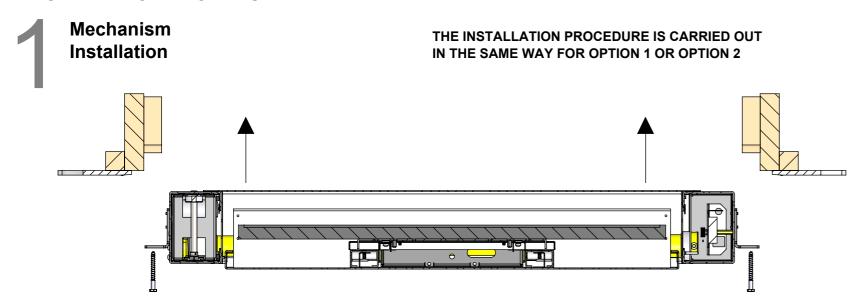

MDF Plaster Trim Installation

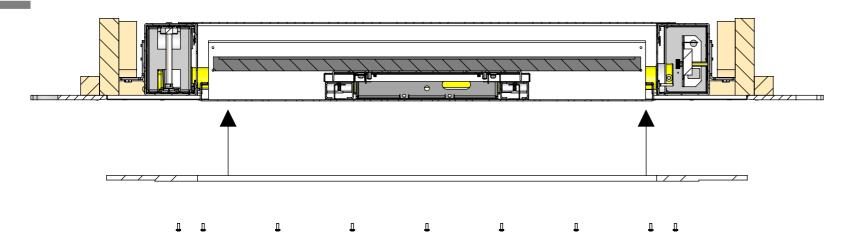

3 Plastering B

DETAIL A SCALE 1:5 28 No. OFF SS M6 x 16MM SUITABLE FIXING POZI (SUPPLIED) (NOT SUPPLIED) 28 No.OFF MDF SCREW (NOT SUPPLIED) **DETAIL B SCALE 1:5** Λ FINISHED CEILING [8.6] 3 [0.1] FINISHED future 218 **CEILING PLASTER** SKIM moving audio visual solutions

US www.futureautomation.net UK www.futureautomation.co.uk


tel: +1 (603) 742 9181 tel: +44 (0) 1438 833 577

7.1

180

[16.1]

moving audio visual solutions

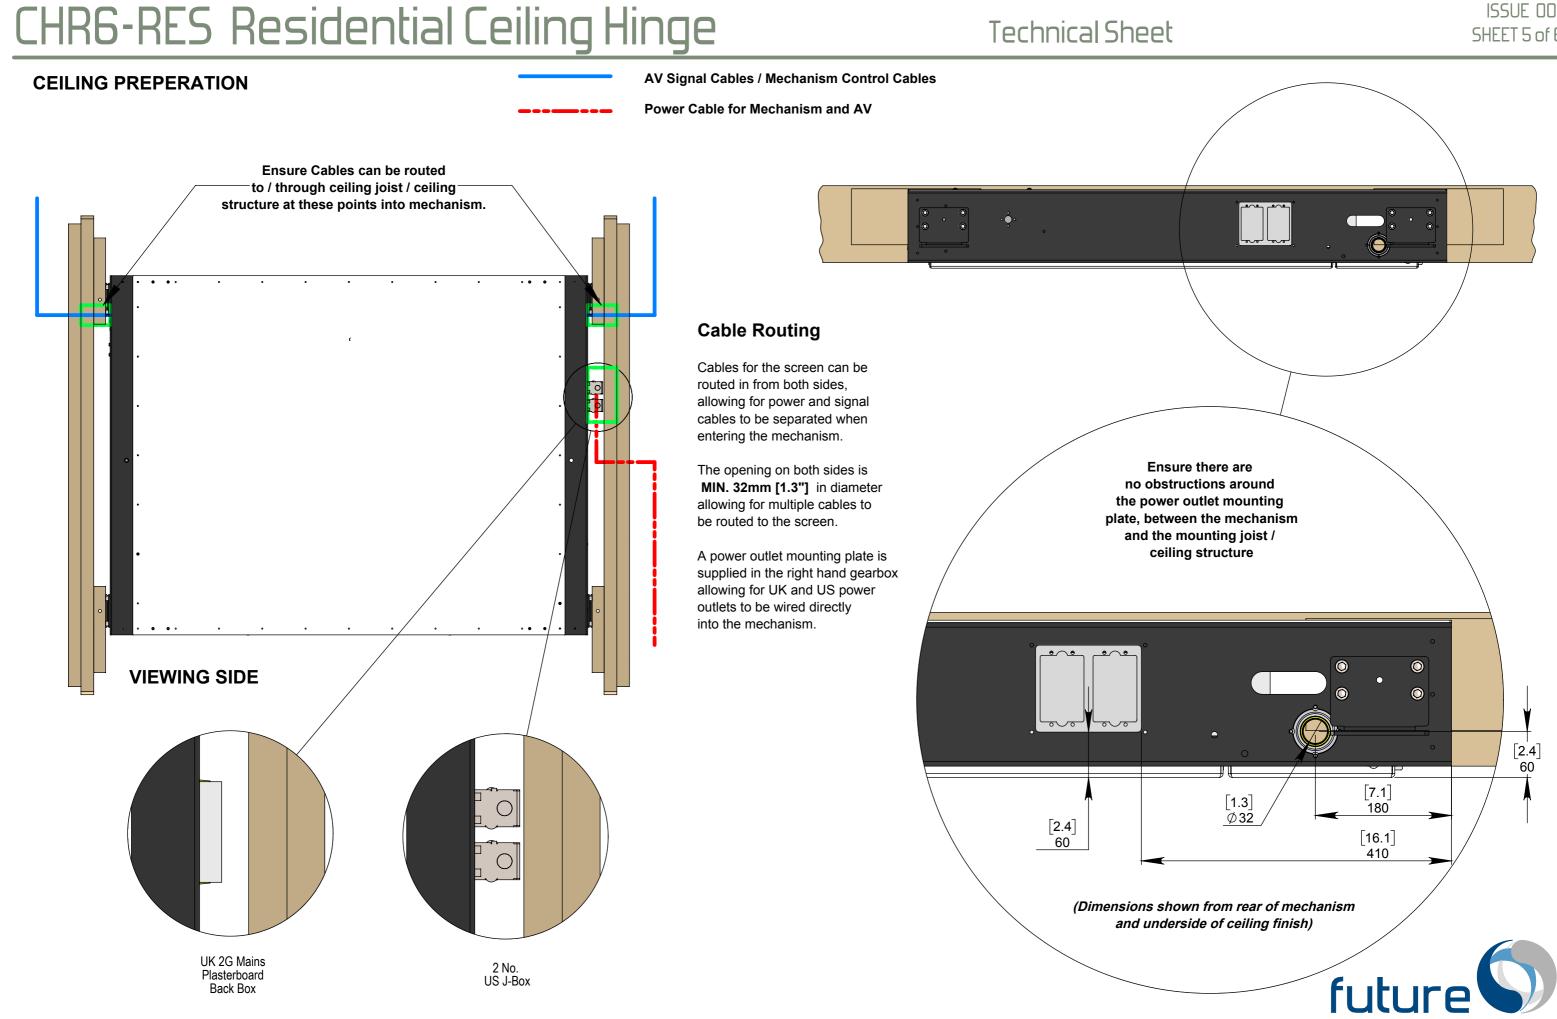

CHR6-RES Residential Ceiling Hinge

