

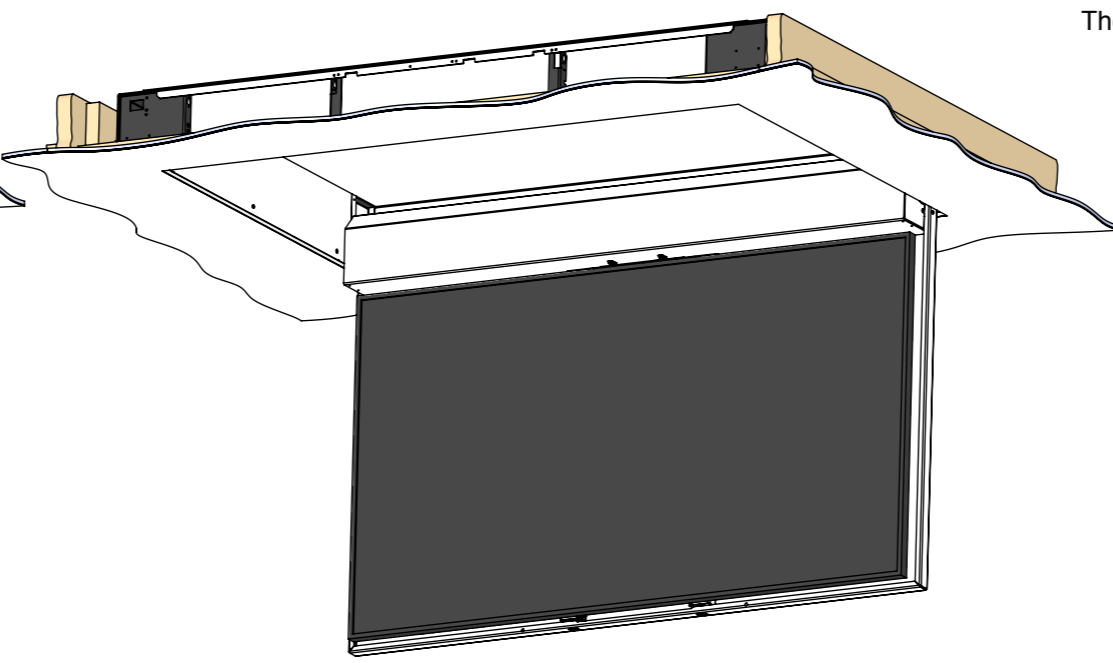


**IN**

**OUT 90 DEGREES**

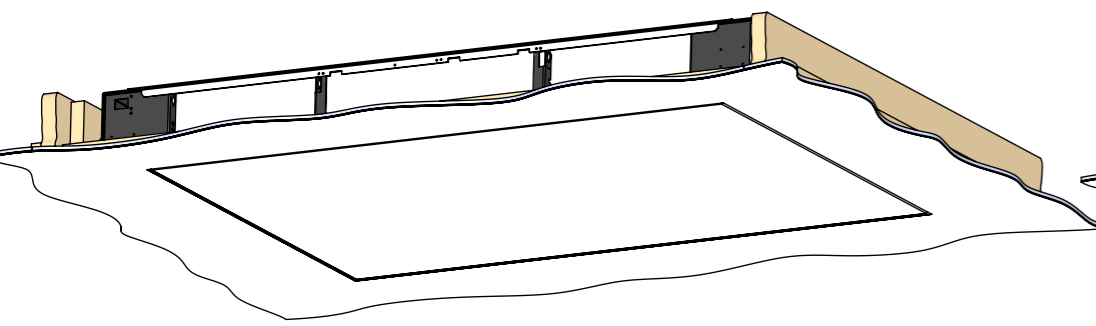

**OUT 100 DEGREES**

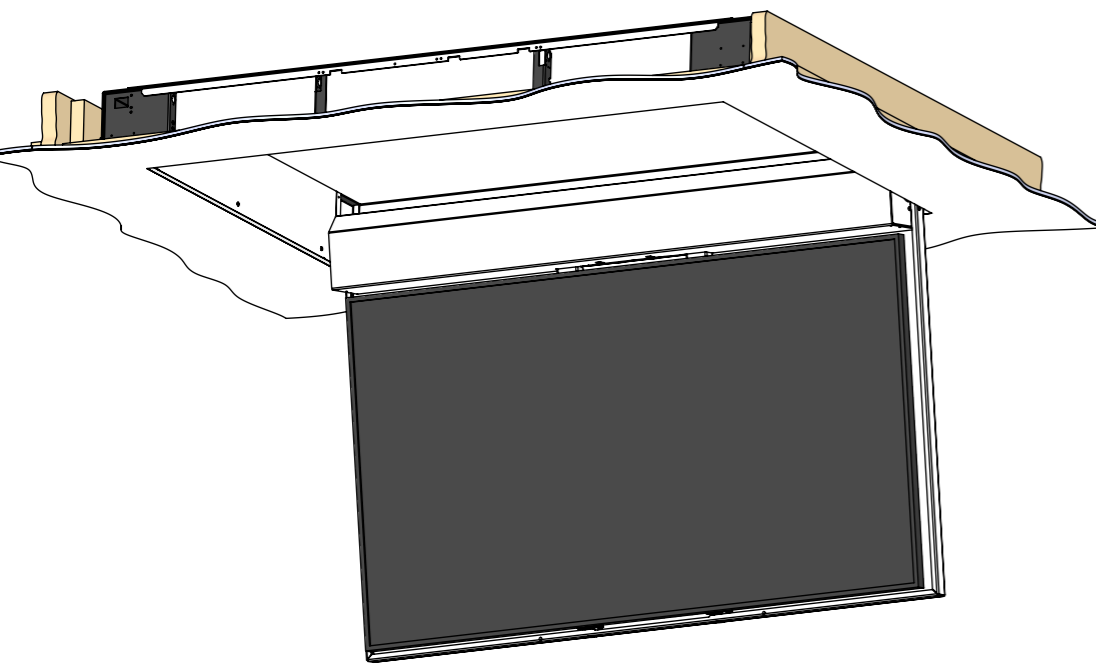

A motorised mechanism to reveal a display from the ceiling. This version hinges down by up to 100 degrees.

The size reference for this version is **CHR8-RES**.


The mechanism is fixed in place before the ceiling is finished. Supplied with MDF plaster edging to neatly plaster into the ceiling.

The control system can be operated via infra-red, RS232 or contact closure inputs.

Speakers can be added with the use of standard speaker mount brackets. (If required please specify during ordering process.)

See overview technical sheet for details on other products in the range.




**RESIDENTIAL MDF PLASTER EDGE**

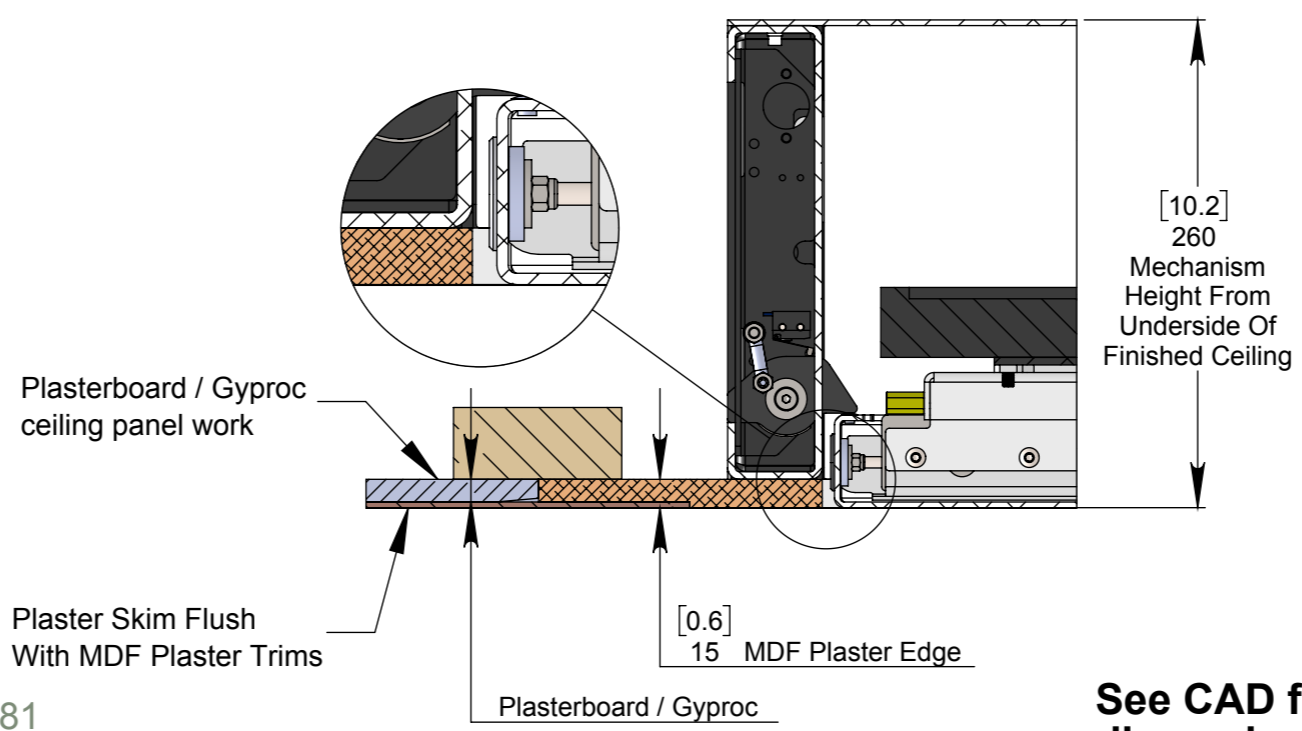


<b>Model Code</b>	<b>CHR8-RES</b>
<b>Max Screen Size</b>	1980mm [78.0] x 1130mm [44.5] x 150mm [5.9]
<b>Max Screen Weight</b>	120kg [264lbs]
<b>Approx Mechanism Weight</b>	166kg [365lbs]
<b>Environment</b>	Residential
<b>Colour</b>	WHITE - RAL9910 Satin Finish
<b>Control System</b>	Accessible by internal access hatch
<b>Ceiling Void Required for Fitting</b>	2474 [97.4] W x 1545 [60.8] L x 260 [10.2] D

NOTE: This mechanism is not designed to accommodate additional panelwork on the main hinging tray. Please see **Tech Note - CHR-RES-AP Addon Panel Technical Note** for more information.



## OPTION 1 - FIXING TO WOODEN BEAMS

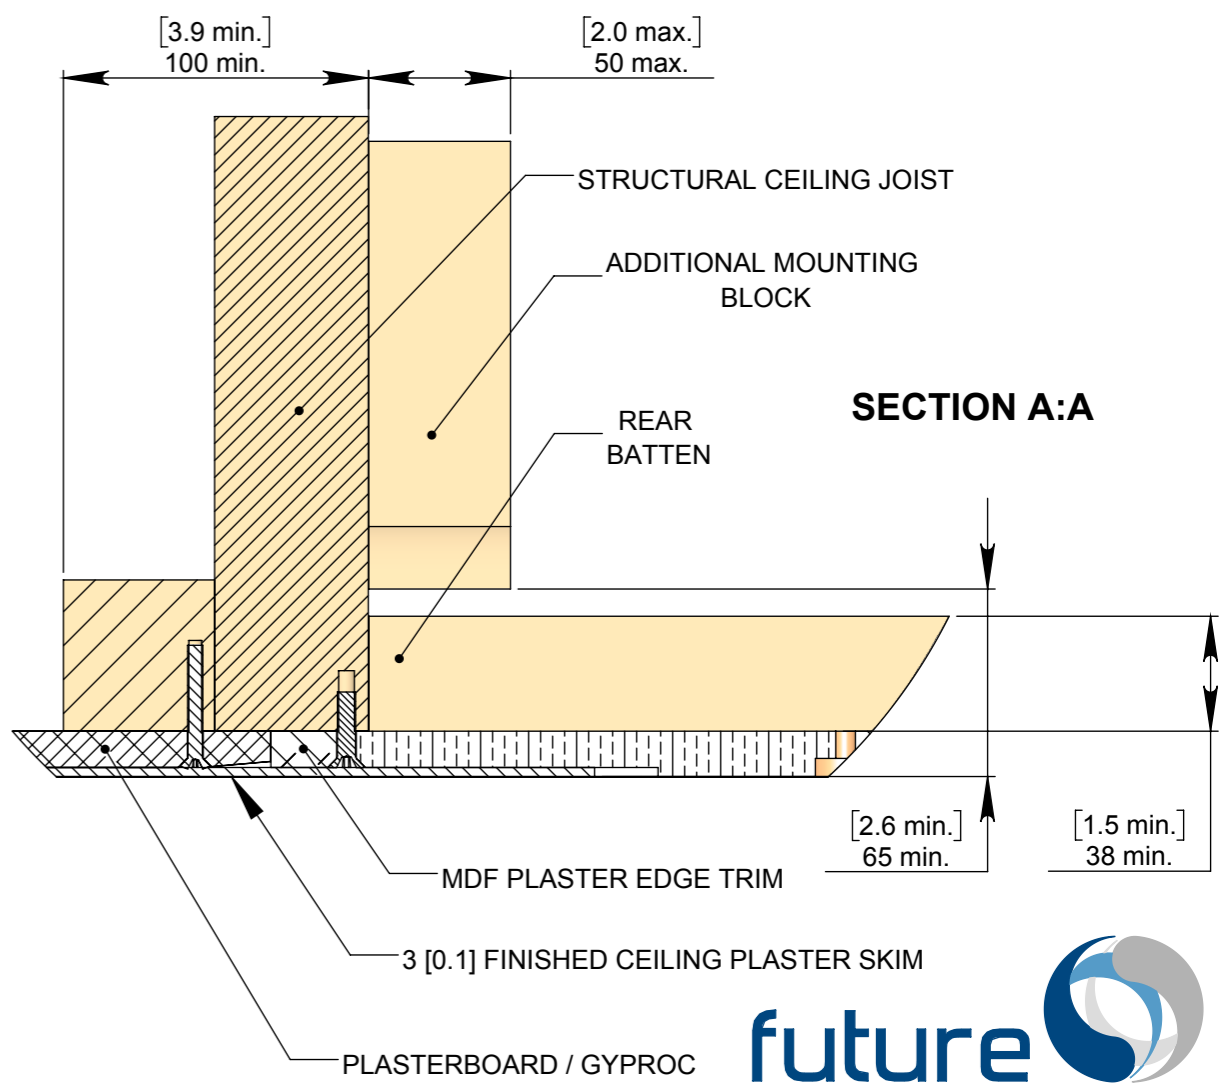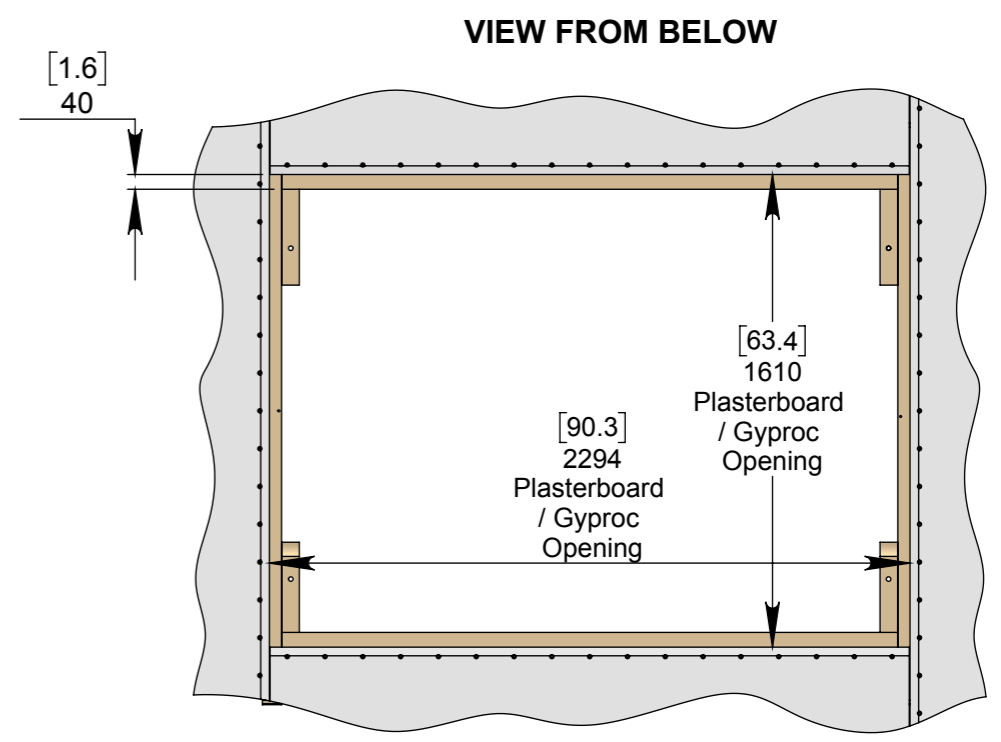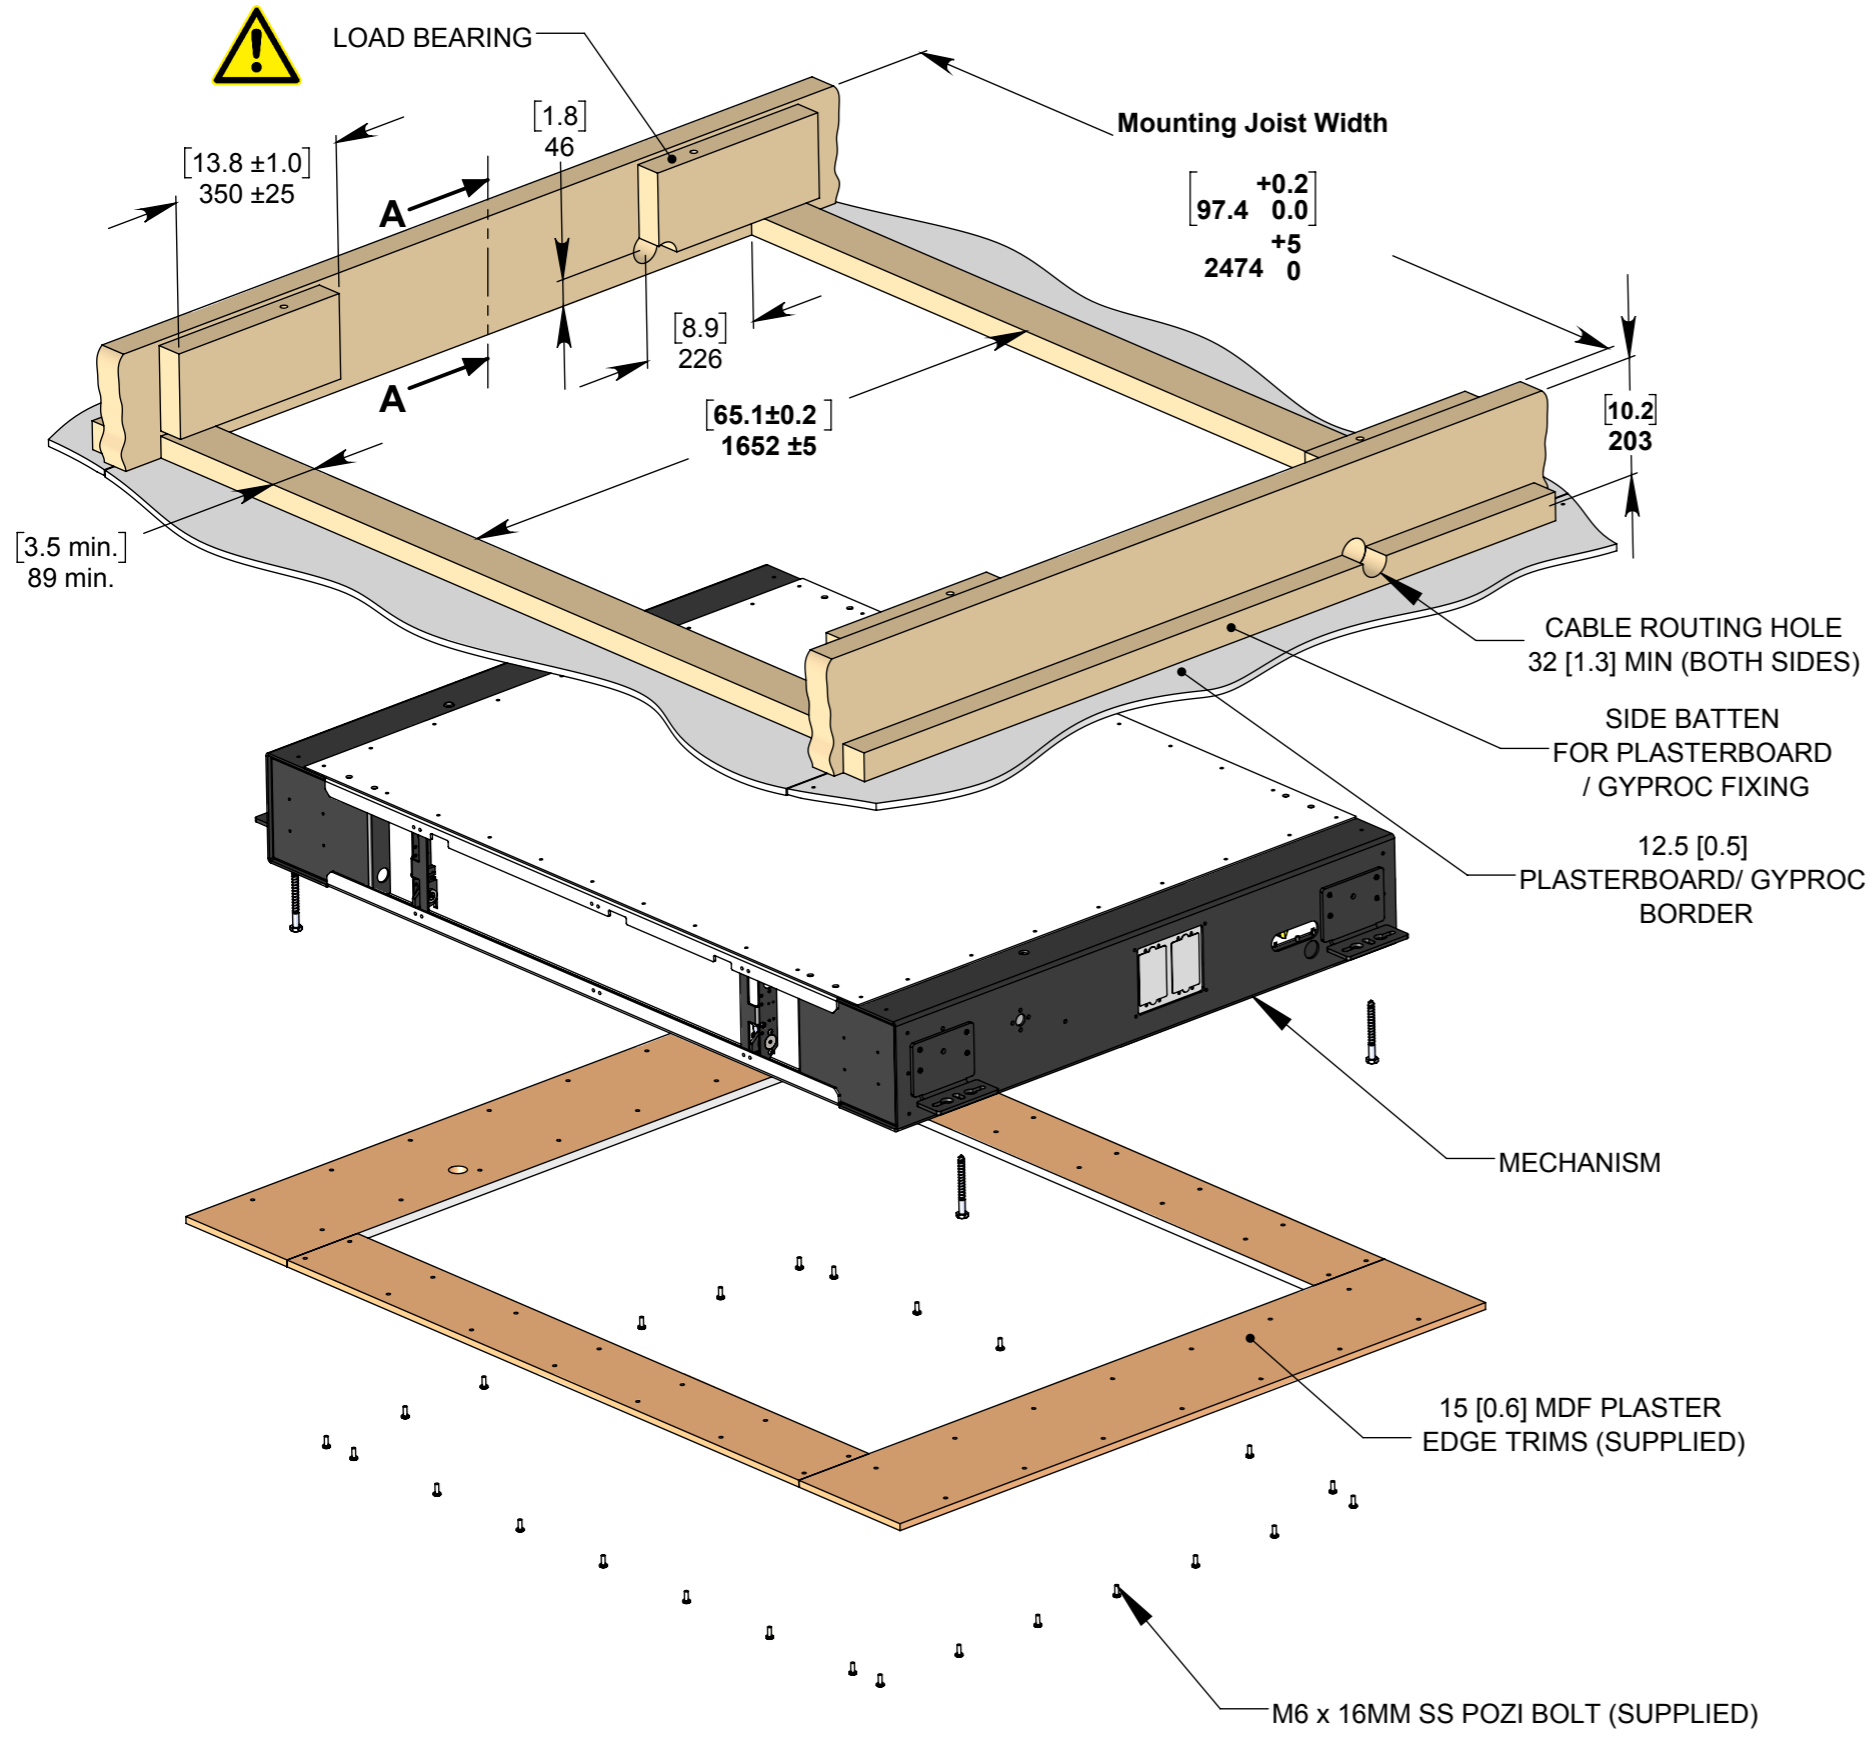

## OPTION 2 - SUSPENDING FROM CEILING STRUCTURE ABOVE

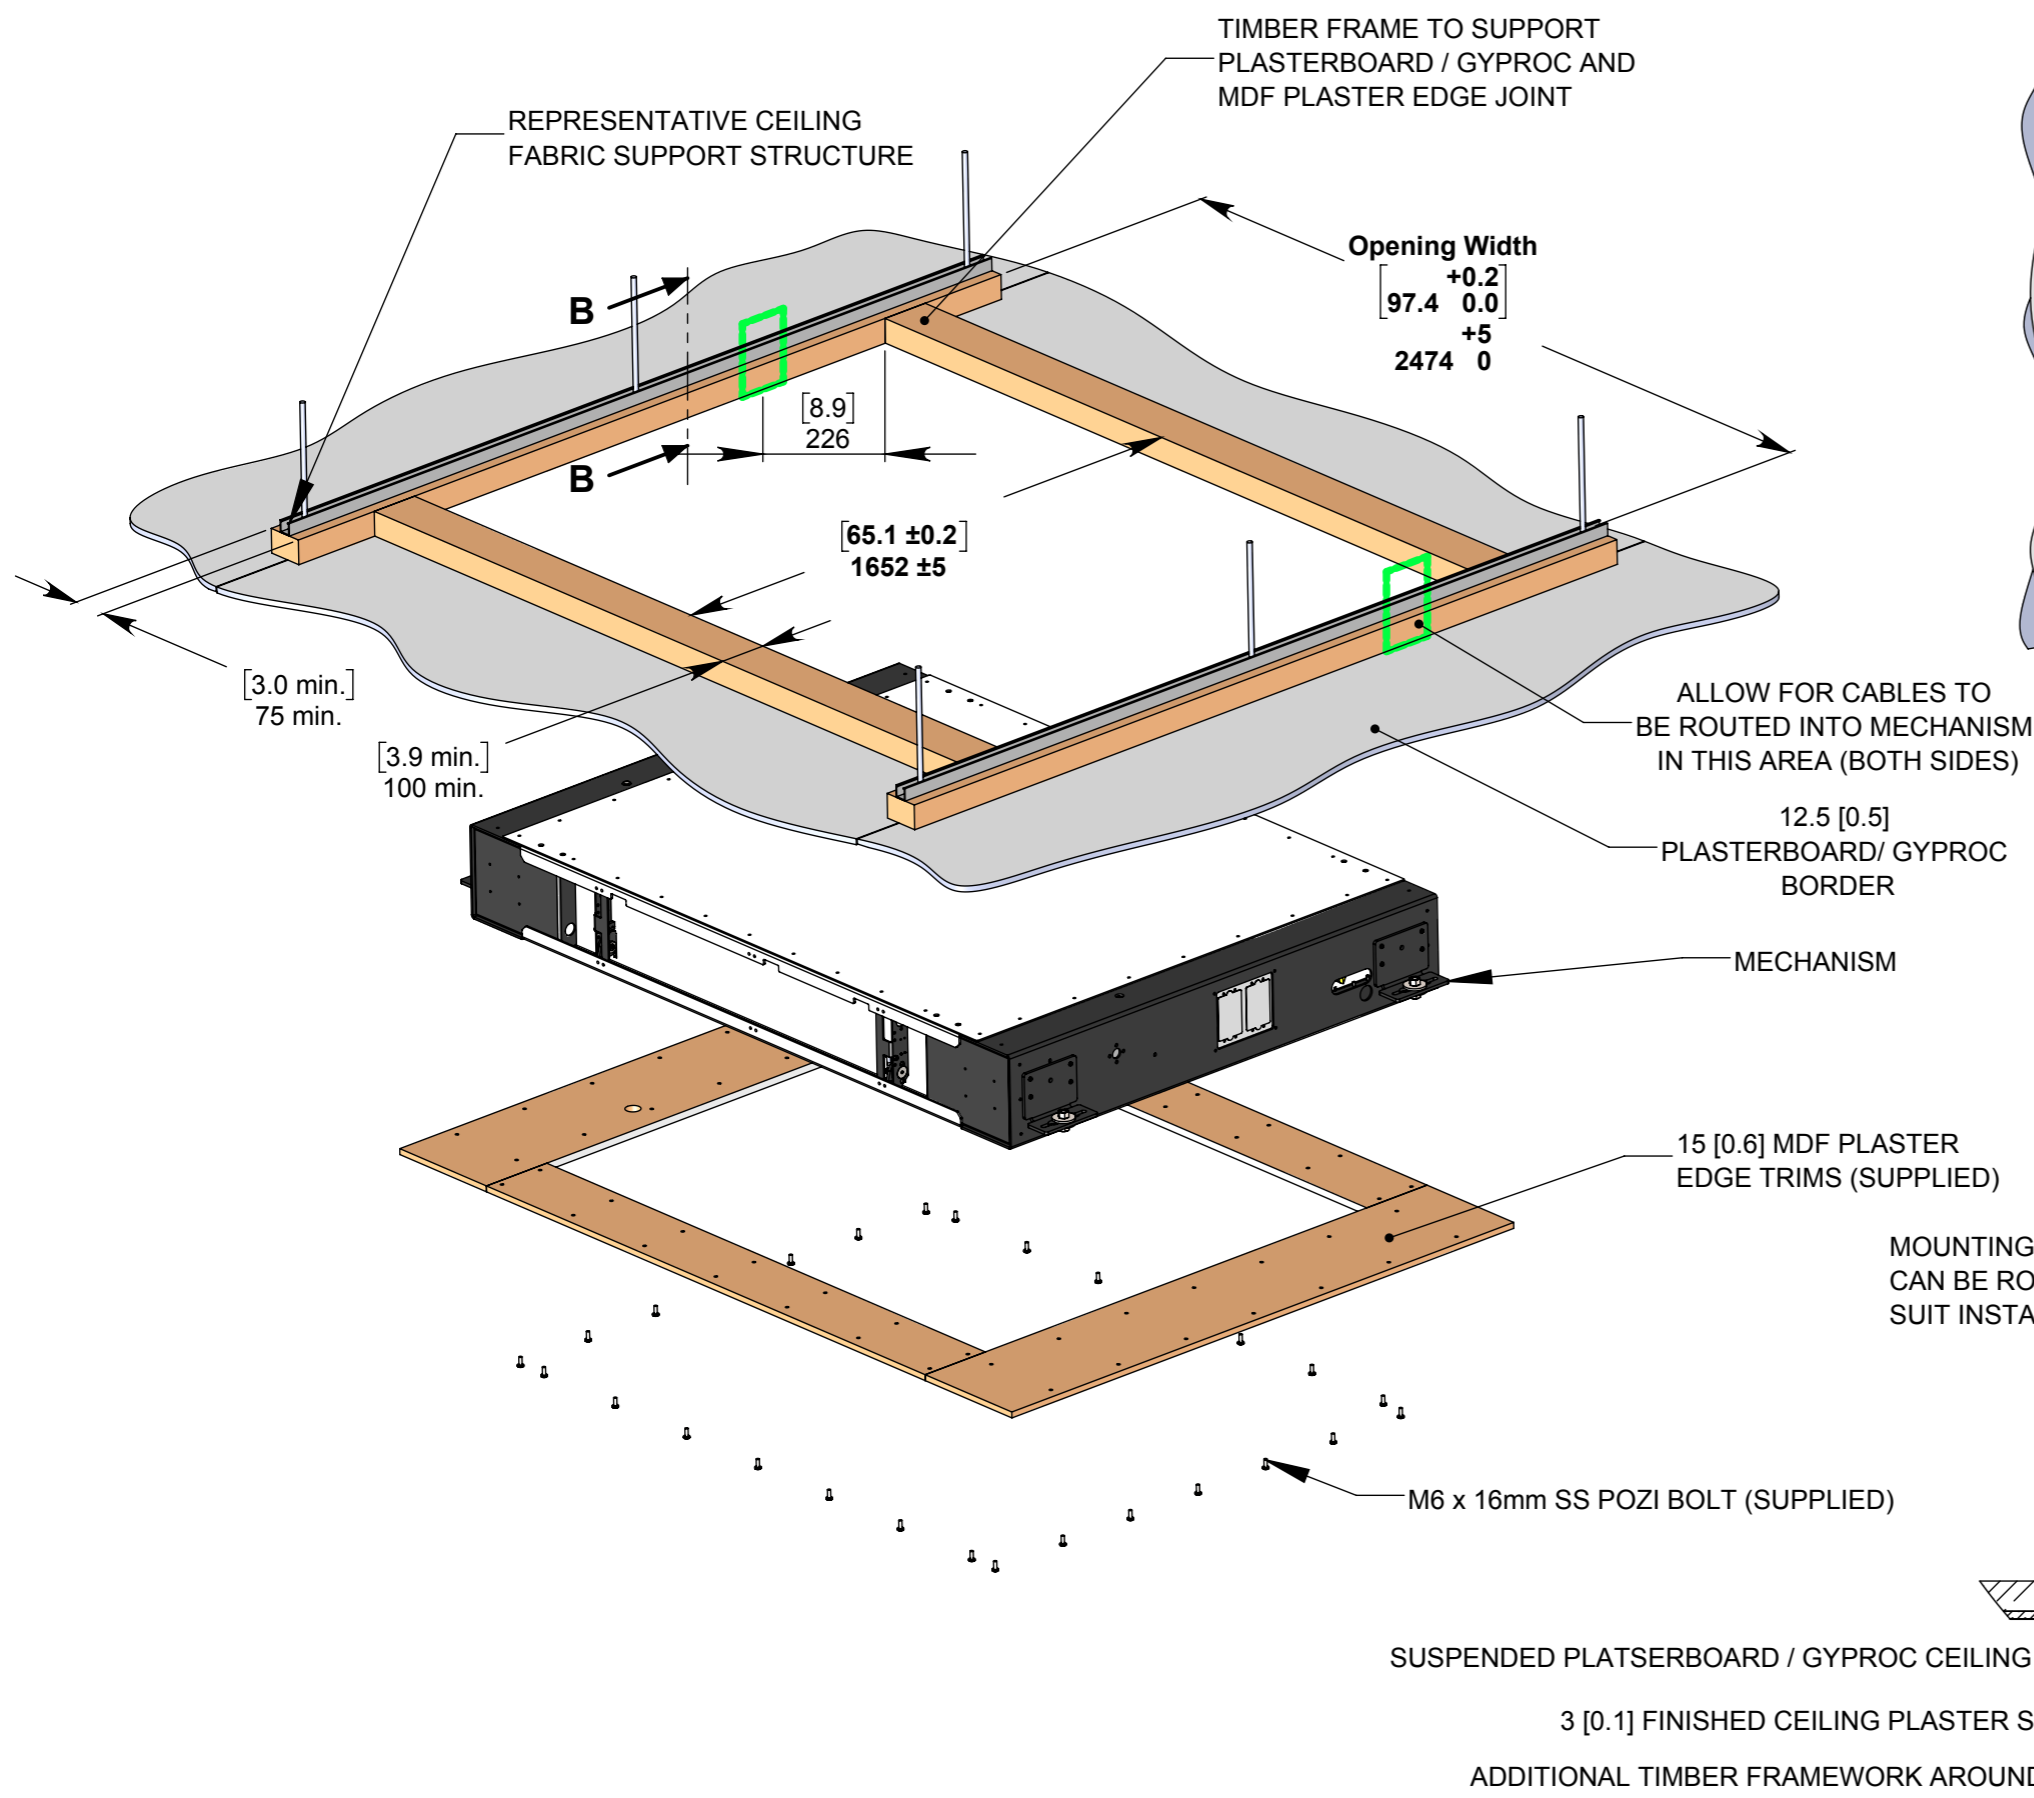



## VIEW FROM BELOW

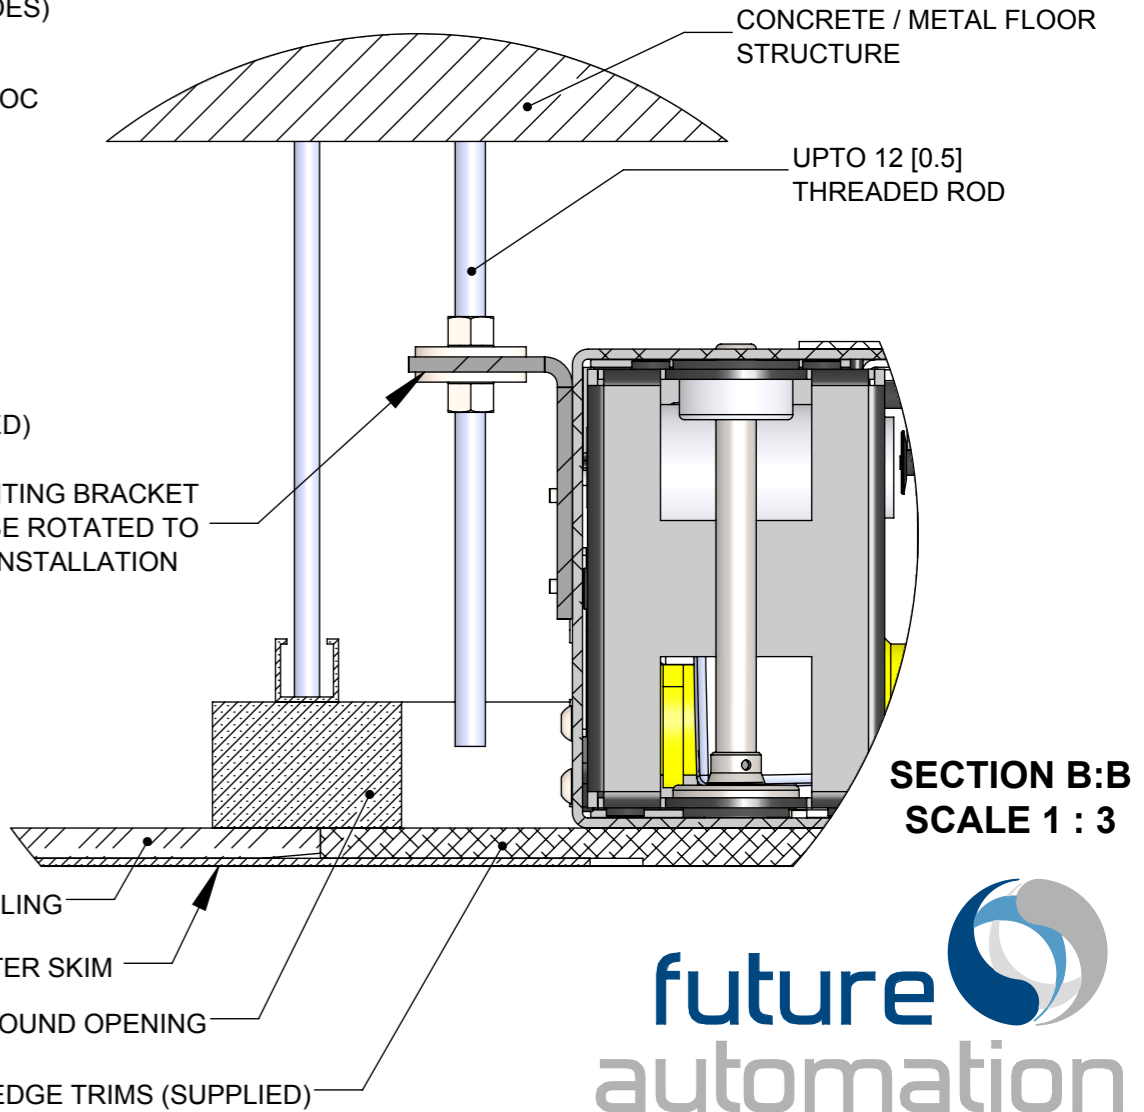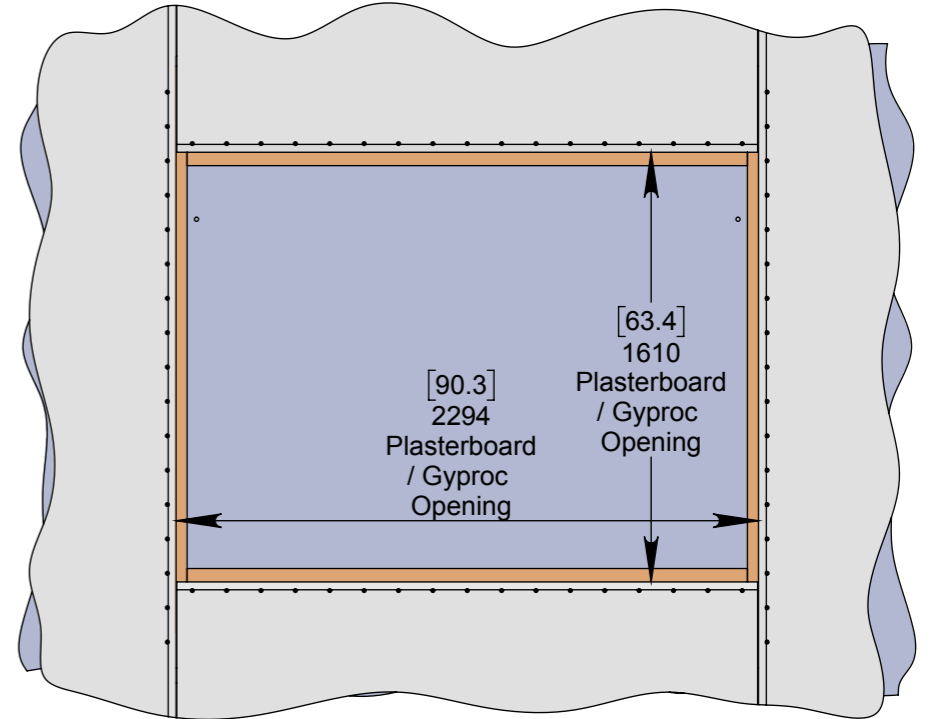


## INSTALLATION PROCEDURE

### 1 Mechanism Installation

THE INSTALLATION PROCEDURE IS CARRIED OUT IN THE SAME WAY FOR OPTION 1 OR OPTION 2

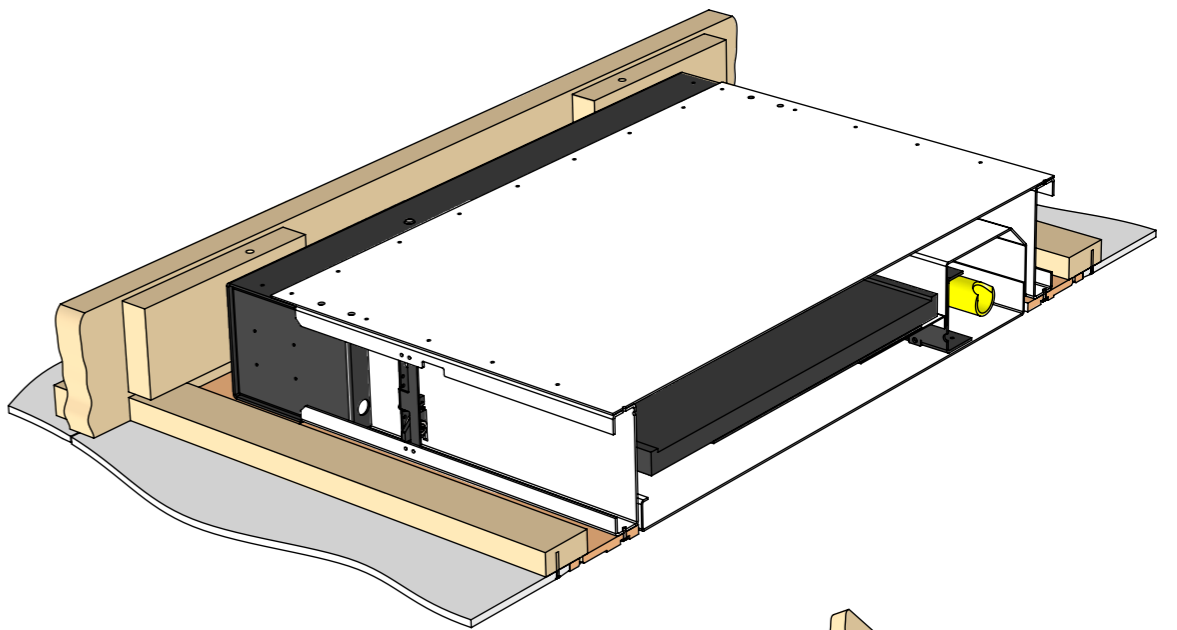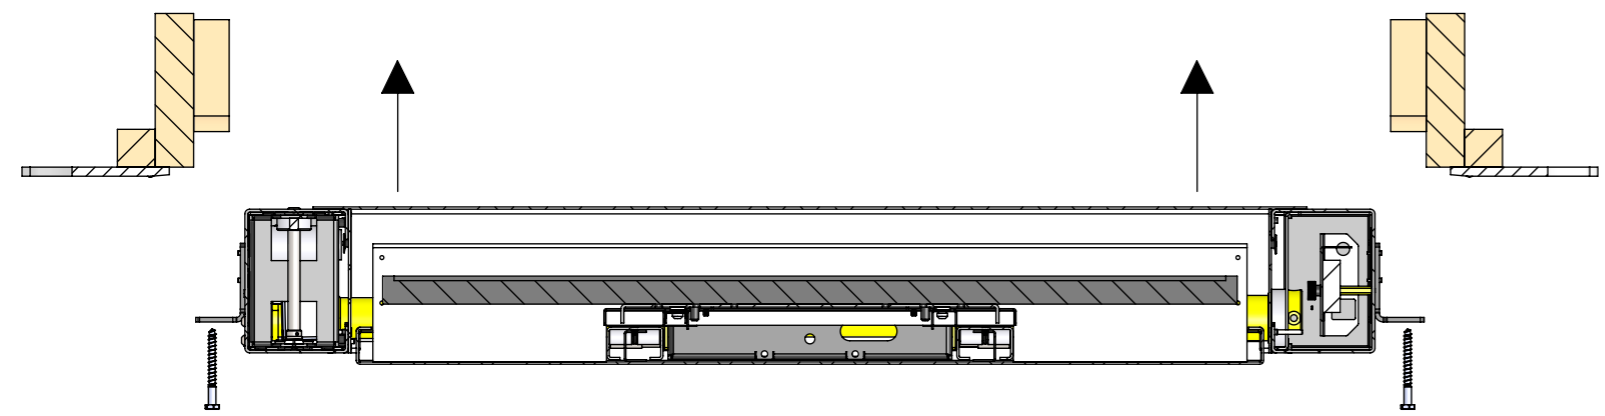


### 2 MDF Plaster Trim Installation

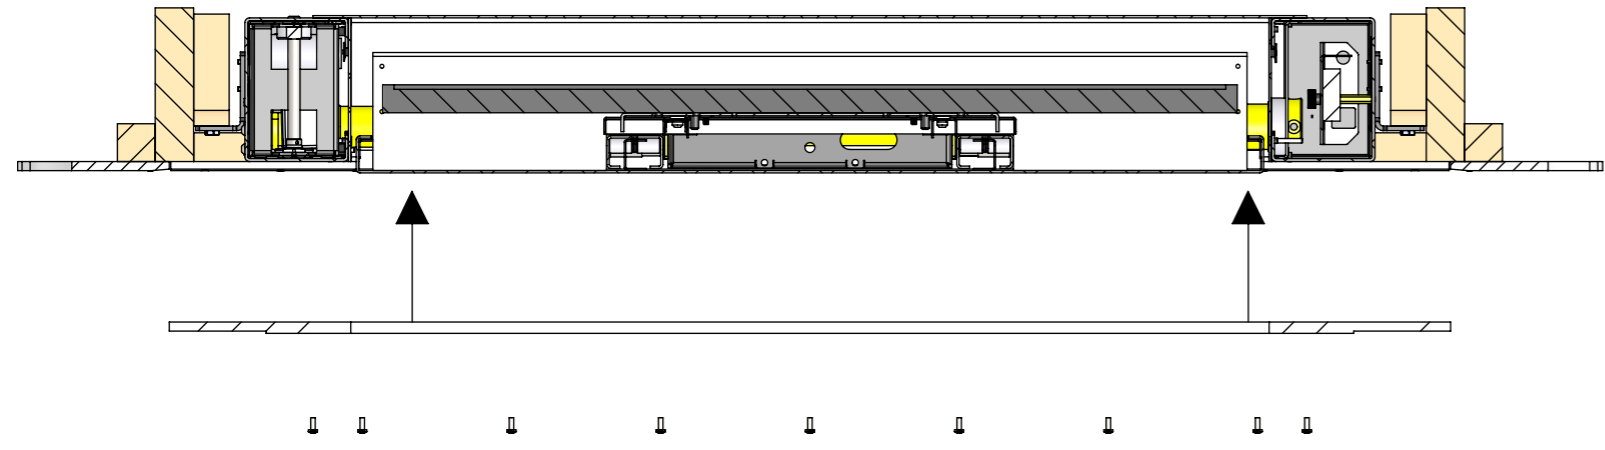


**DETAIL A**  
SCALE 1 : 5

- 28 No. OFF SS M6 x 16MM POZI (SUPPLIED)
- 28 No. OFF MDF SCREW (NOT SUPPLIED)

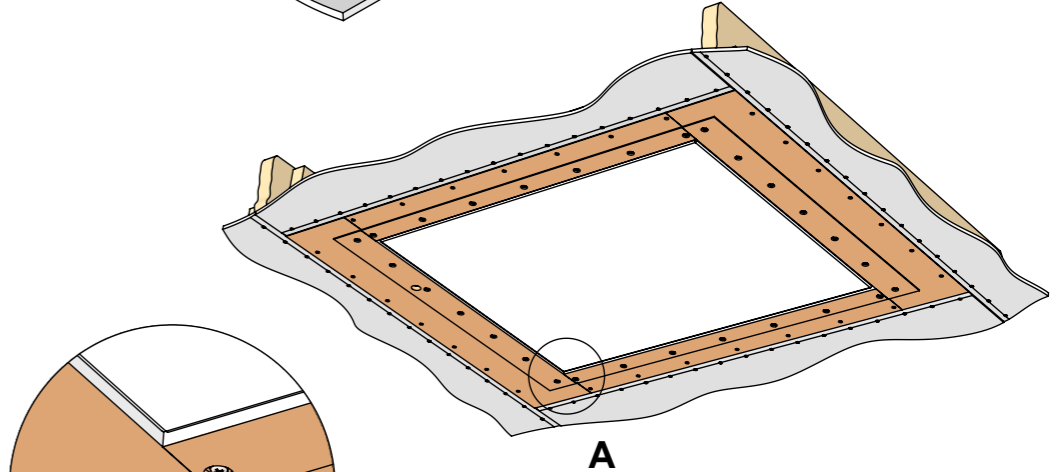


### 3 Plastering

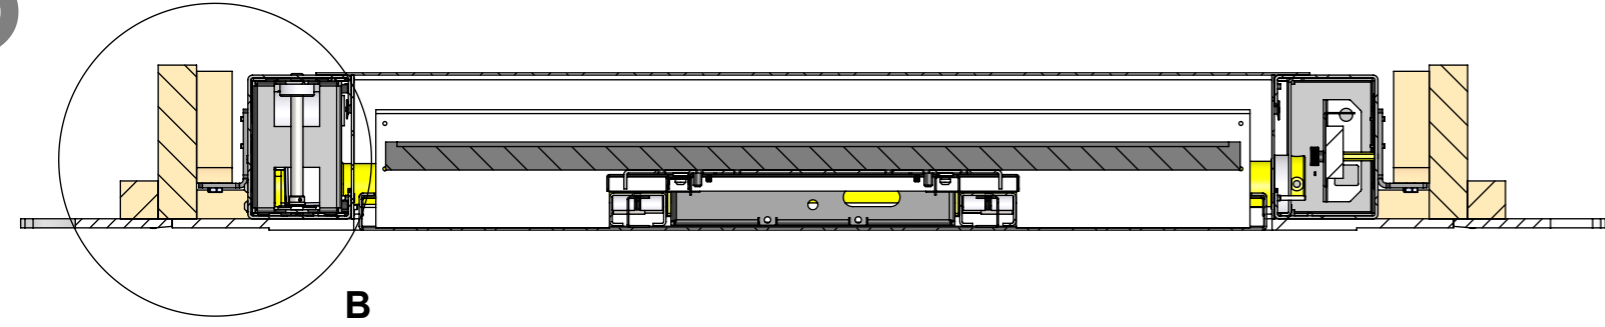

**DETAIL B**  
SCALE 1 : 5


3 [0.1] FINISHED CEILING PLASTER SKIM

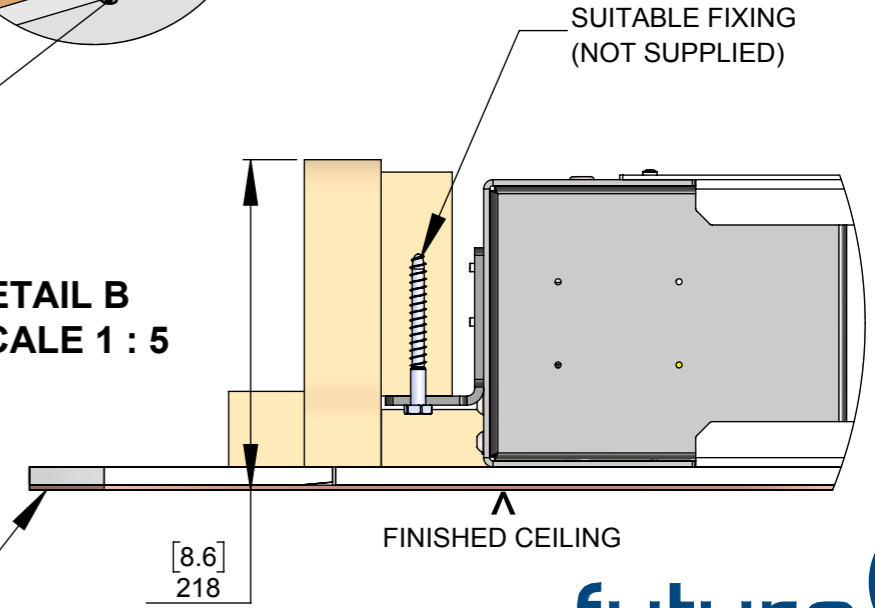

## CEILING PREPERATION

— AV Signal Cables / Mechanism Control Cables  
 - - - Power Cable for Mechanism and AV

Ensure Cables can be routed to / through ceiling joist / ceiling structure at these points into mechanism.

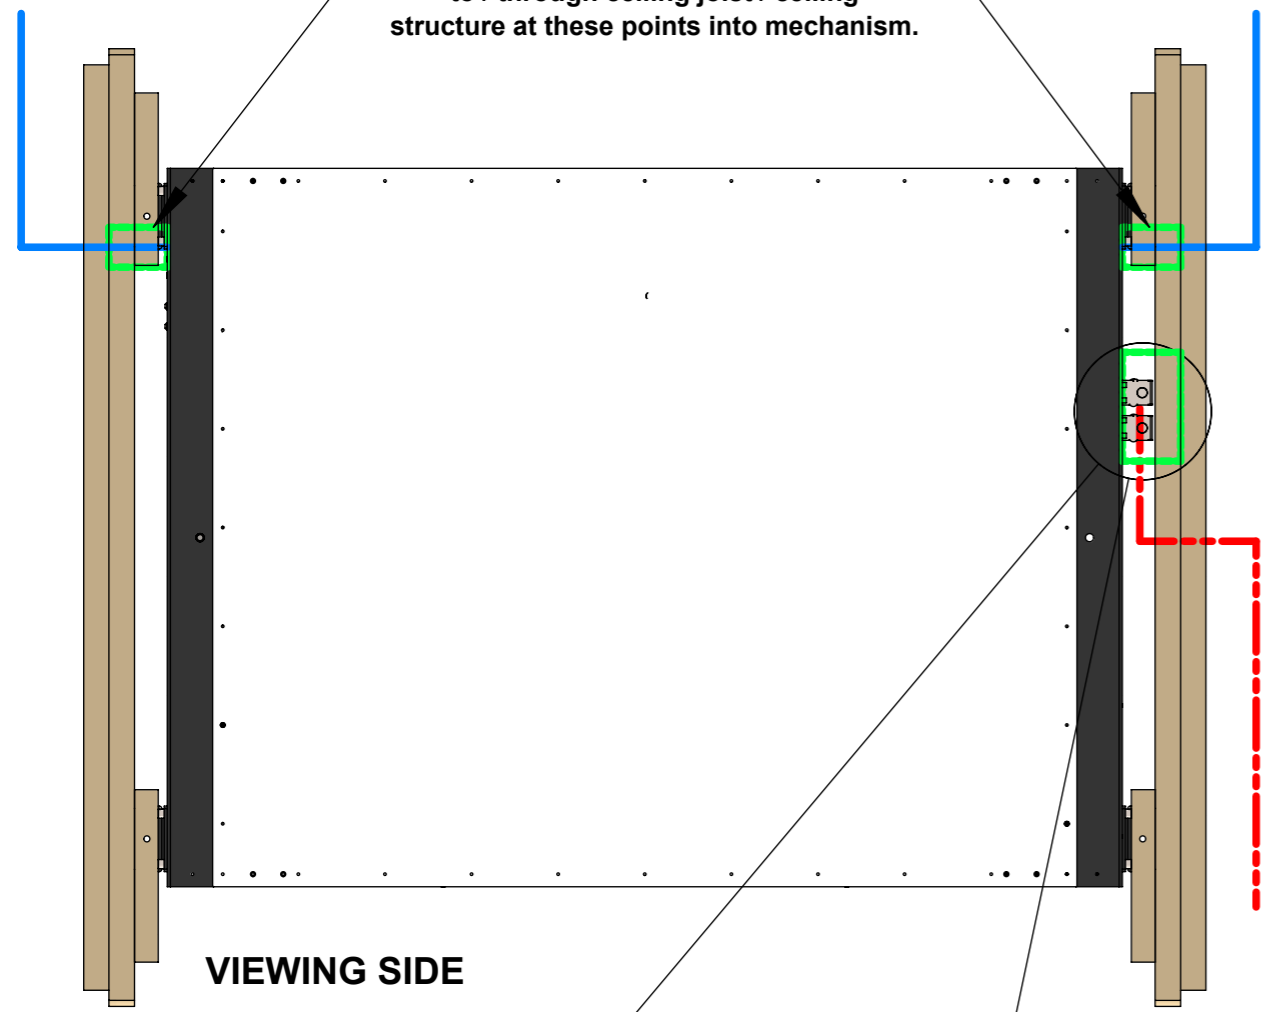

VIEWING SIDE

UK 2G Mains  
Plasterboard  
Back Box


2 No.  
US J-Box

## Cable Routing


Cables for the screen can be routed in from both sides, allowing for power and signal cables to be separated when entering the mechanism.

The opening on both sides is **MIN. 32mm [1.3"]** in diameter allowing for multiple cables to be routed to the screen.


A power outlet mounting plate is supplied in the right hand gearbox allowing for UK and US power outlets to be wired directly into the mechanism.

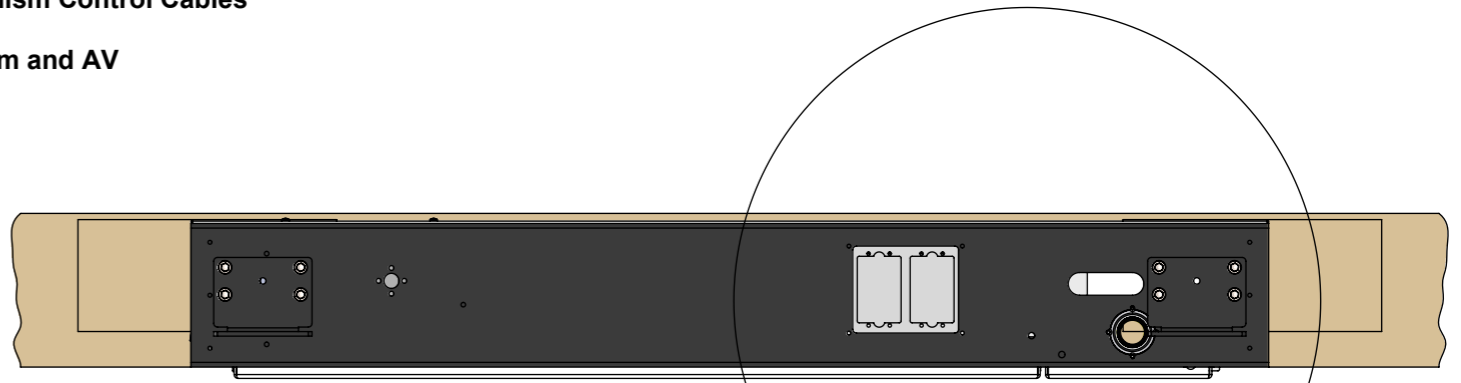




Ensure there are no obstructions around the power outlet mounting plate, between the mechanism and the mounting joist / ceiling structure

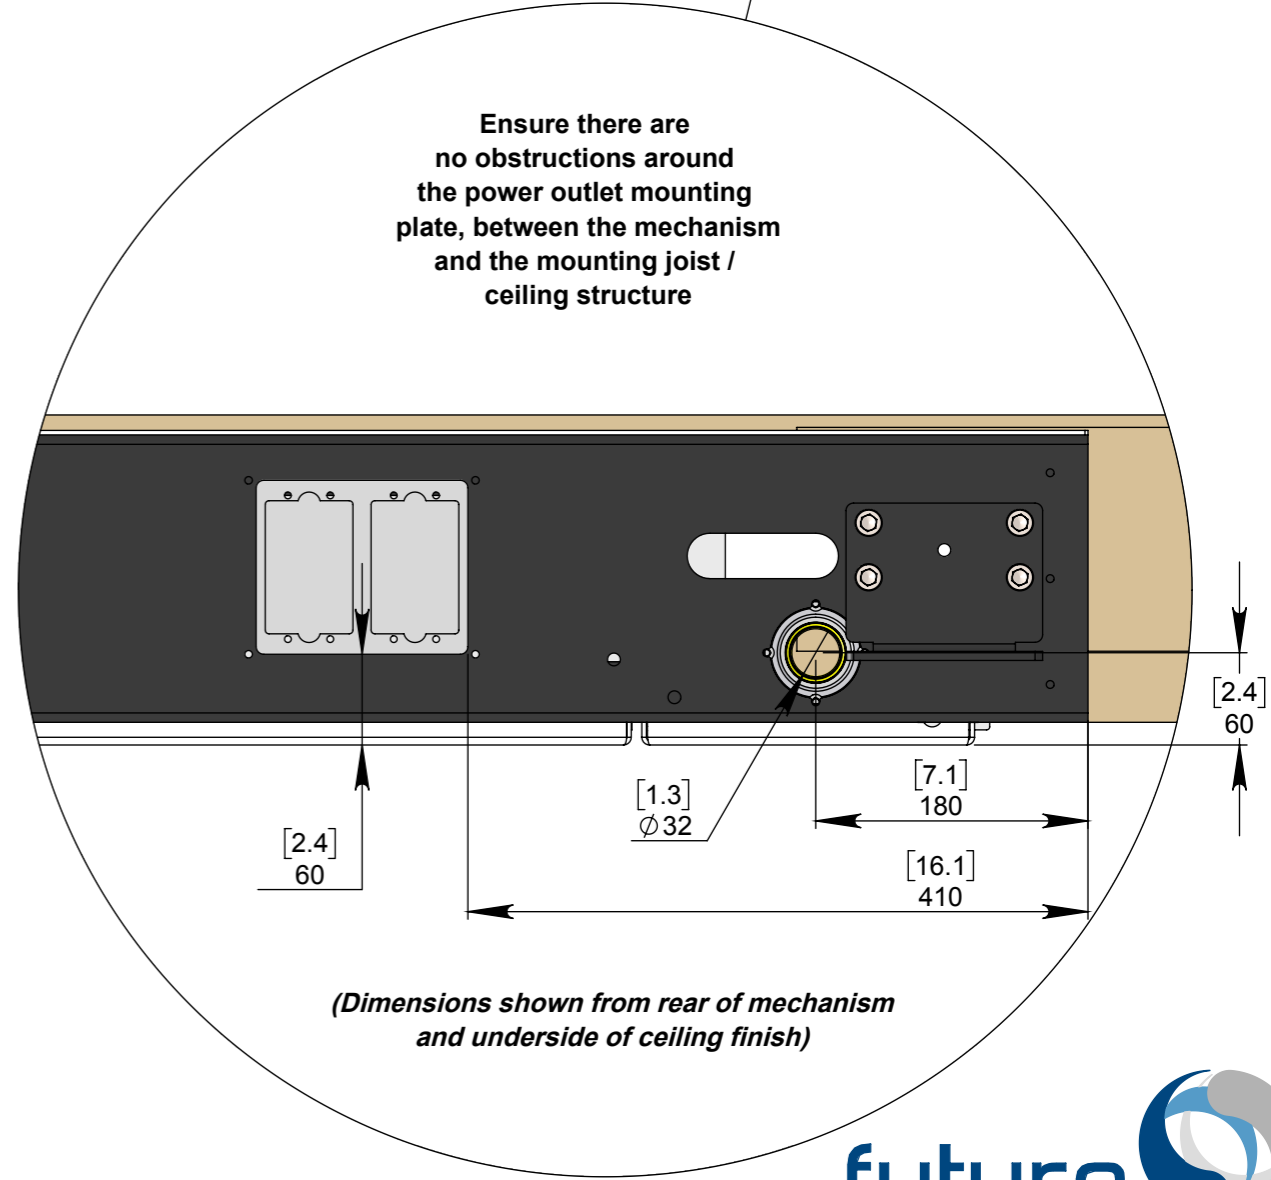

(Dimensions shown from rear of mechanism and underside of ceiling finish)

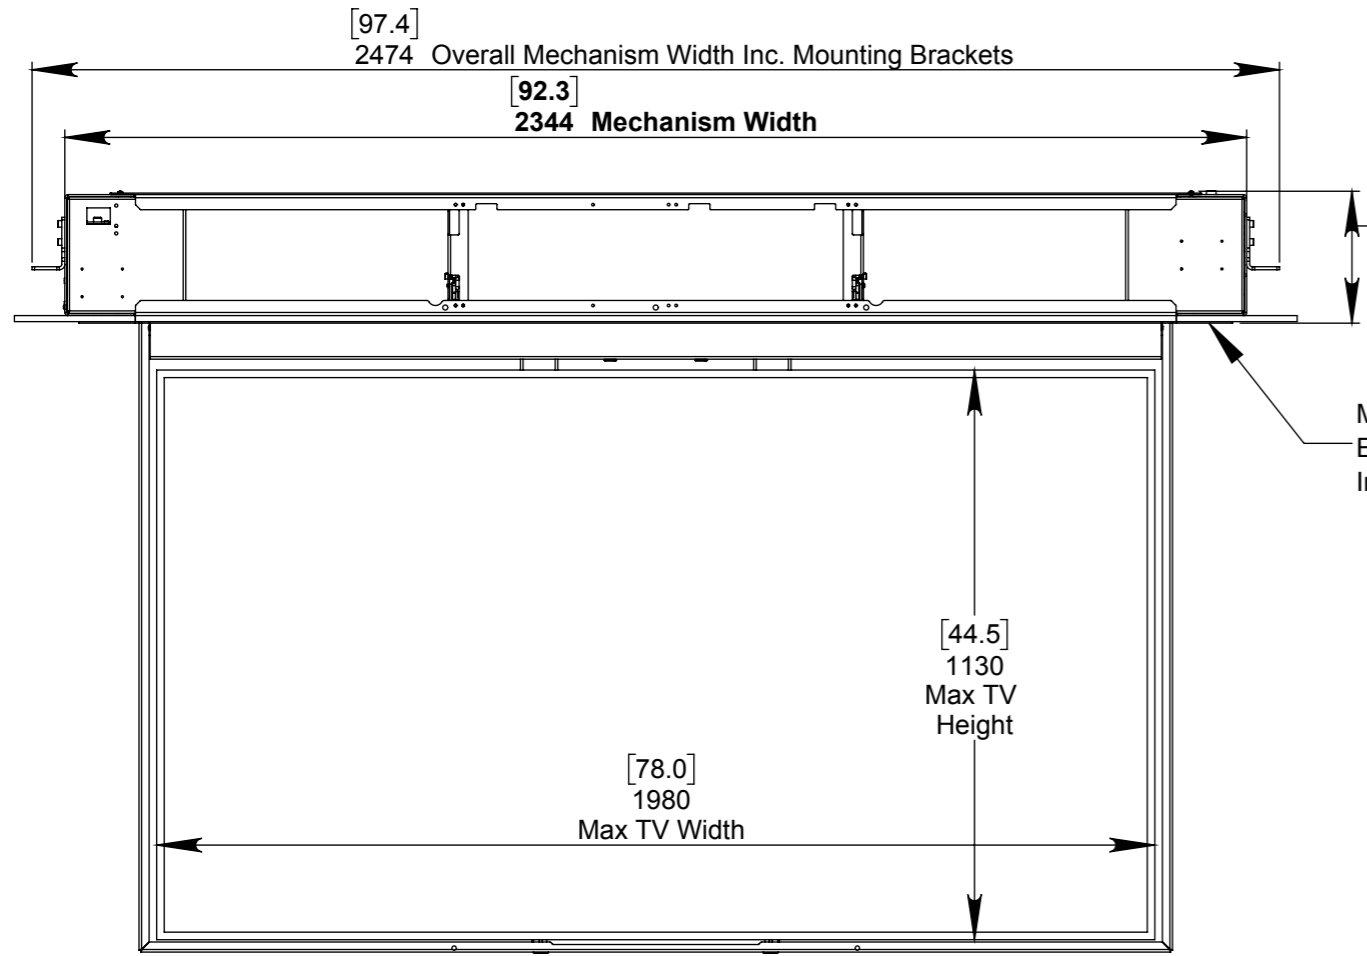

MDF Plaster  
Edge Trims  
Installed

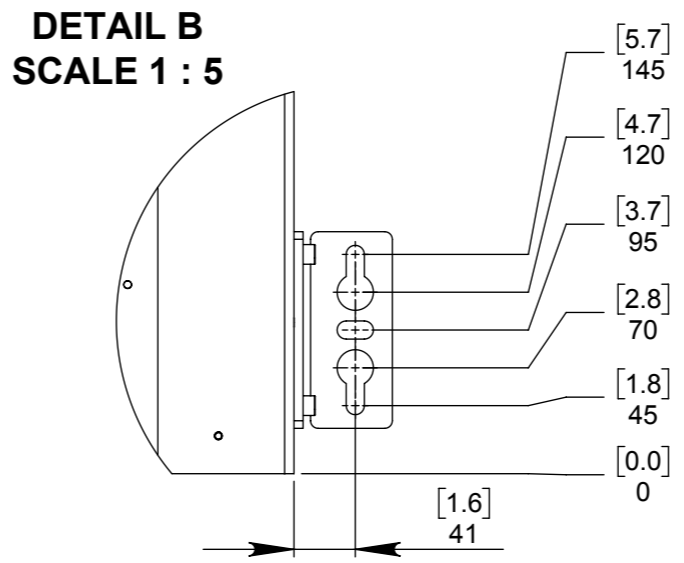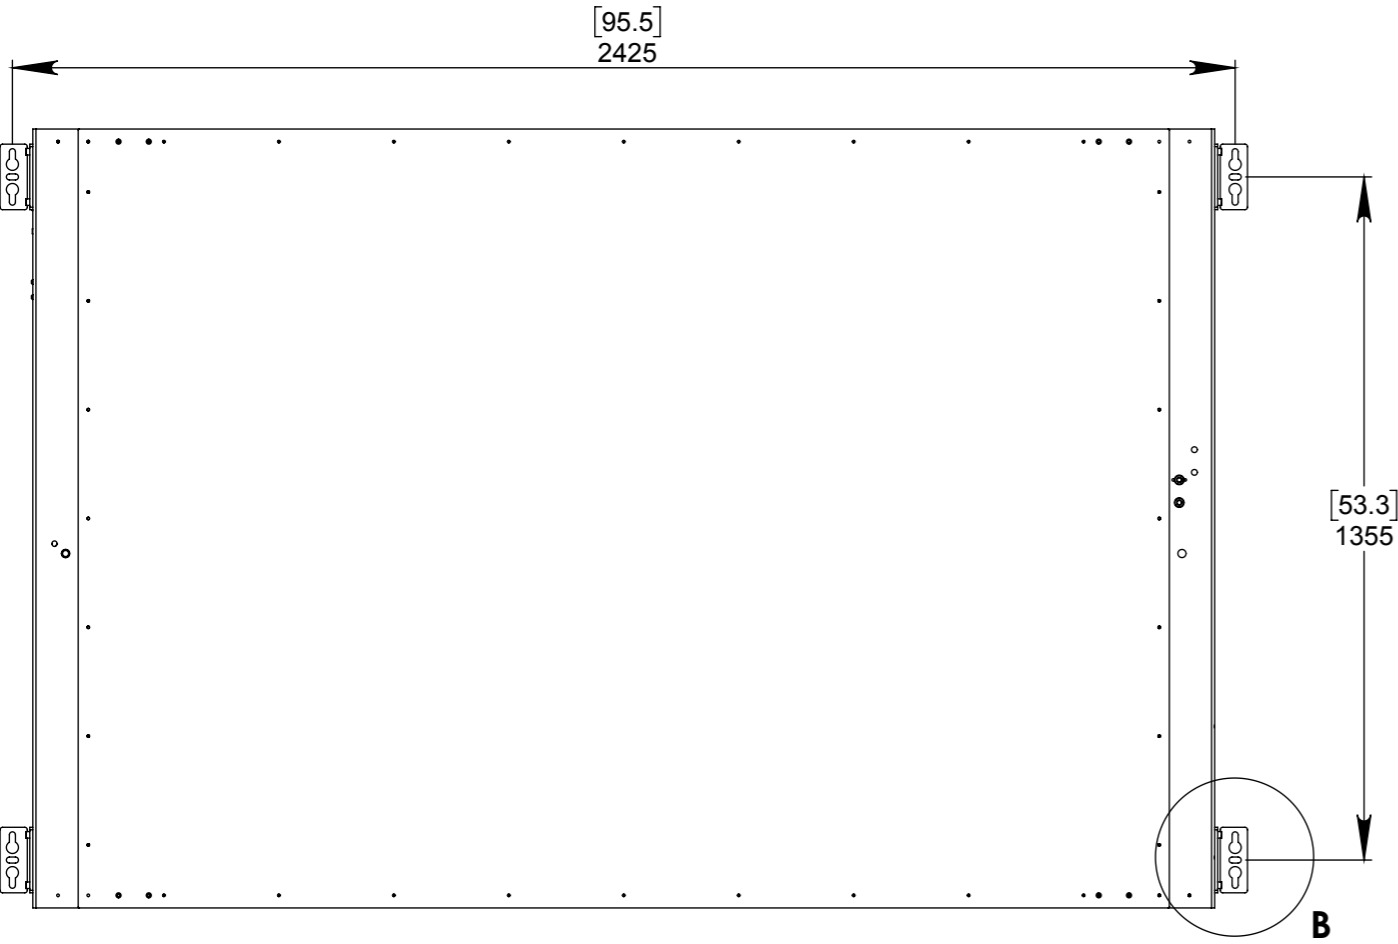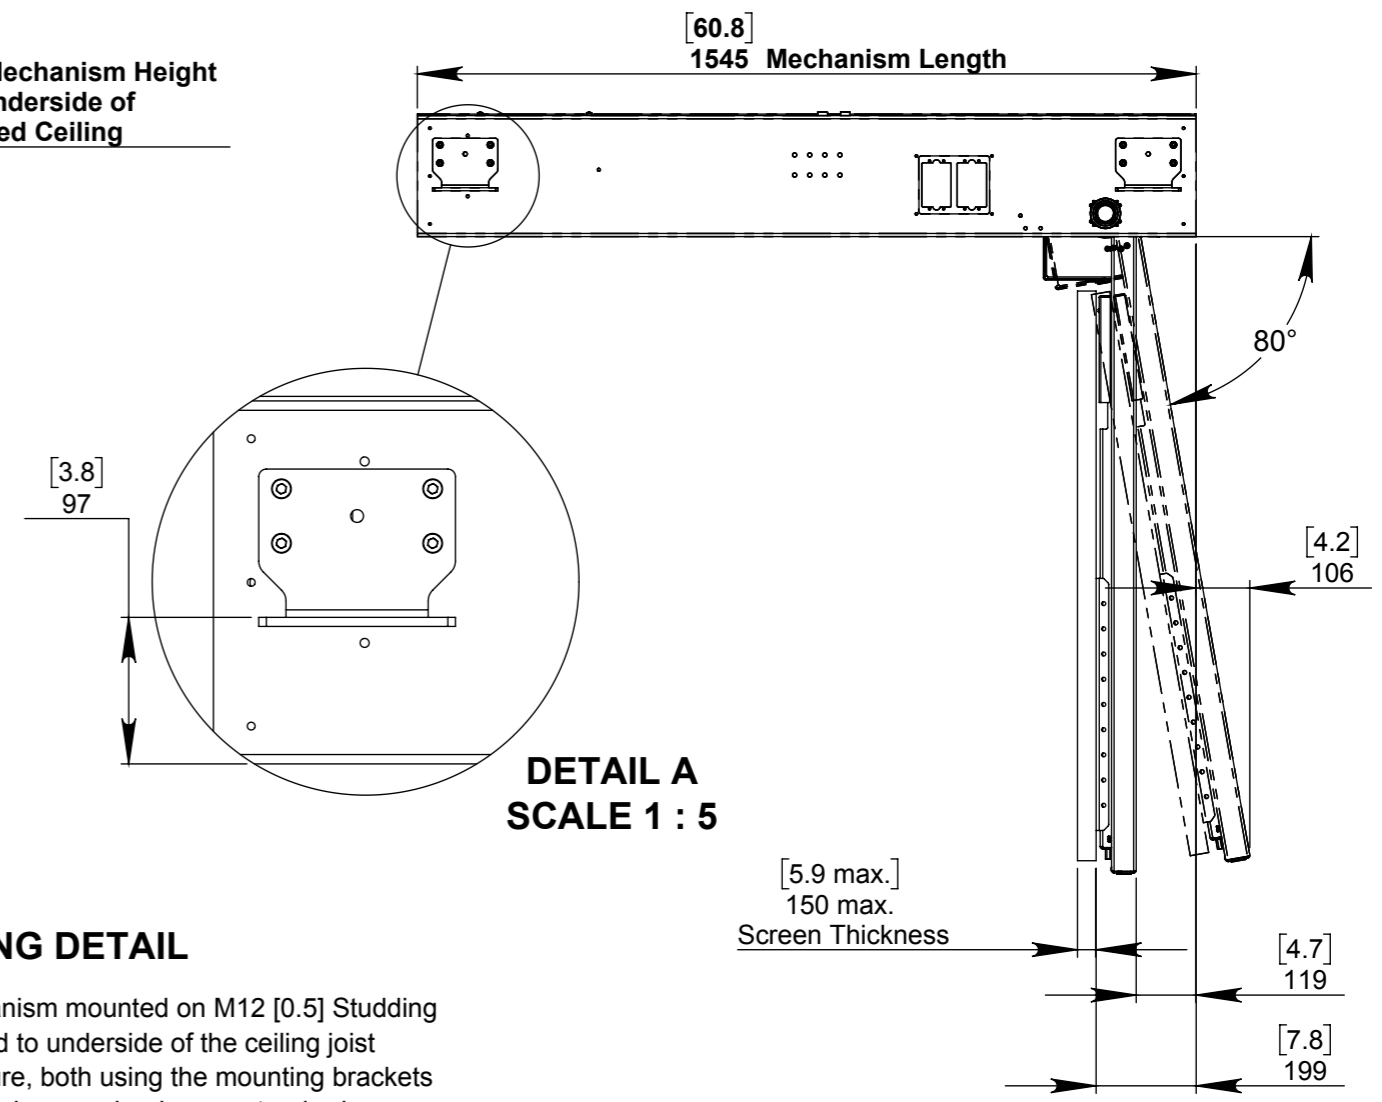

See CAD files for more dimensional information.